



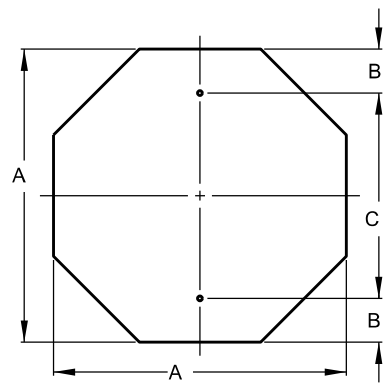


OCTAGONAL

A	B	C	T
18	3	18	0.080
30	3	24	0.080
36	3	30	0.100
48	3	36	0.100

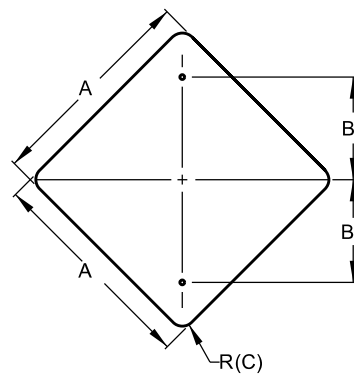


DIAMOND (A)

A	B	C	T
18	9	1 1/2	0.080
24	12	1 1/2	0.080
30	15	1 7/8	0.080
36	18	2 1/4	0.100

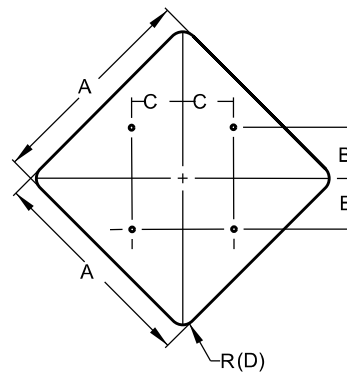


DIAMOND (B)

A	B	C	D	T
48	15	15	3	0.100




CIRCLE

A	B	T
18	15	0.100




PENTAGON (SCHOOL)

A	B	C	D	T
30	*	3	*	0.100
36	24	3	2 1/4	0.100
48	*	*	3	0.100

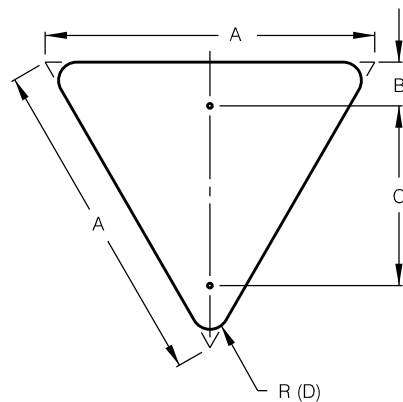


EQUILATERAL TRIANGLE

A	B	C	D	T
18	2	18	2	0.100
30	2	24	2	0.100
36	2	24	2	0.100
48	2	24	2	0.100
60	2	24	2	0.100

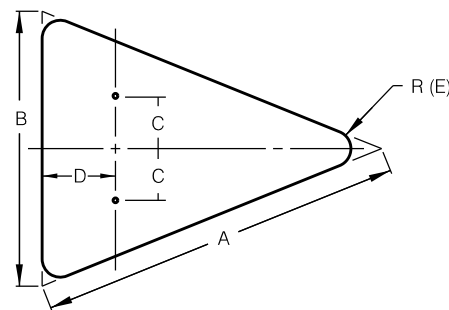


ISOSCELES TRIANGLE

A	B	C	D	E	T
40	30	7 1/2	12	1 7/8	0.100
48	36	9	15	2 1/4	0.100
64	48	10 1/2	18	2 3/4	0.100

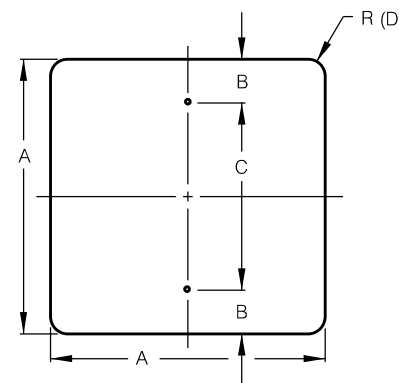


SQUARE (A)

A	B	C	D	T
18	1 1/2	15	1 1/2	0.080
24	3	18	1 1/2	0.080
30	3	24	1 7/8	0.080

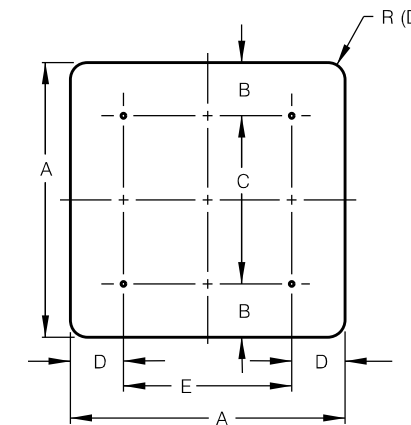


SQUARE (B)

A	B	C	D	E	F	T
36	*	*	*	*	*	0.100
48	6	36	9	30	3	0.100

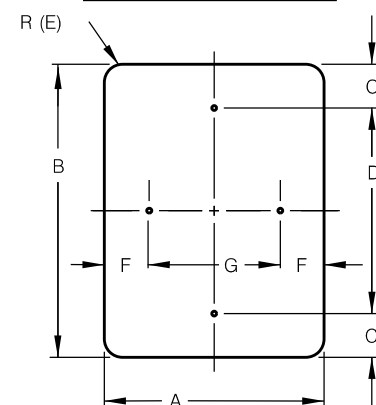


VERTICAL / HORIZONTAL RECTANGLE

A	B	C	D	E	F	G	T
12	18	1 1/2	15	1 1/2	1 1/2	9	0.080
12	36	3	30	1 1/2	1 1/2	9	0.080
18	24	1 1/2	21	1 1/2	1 1/2	15	0.080
24	30	3	24	1 1/2	3	18	0.080
24	36	3	30	1 1/2	3	18	0.080
24	48	6	36	1 7/8	3	18	0.080
30	36	3	30	1 7/8	3	24	0.080
36	48	3	30	1 7/8	3	24	0.080
48	60	3	30	1 7/8	3	24	0.080

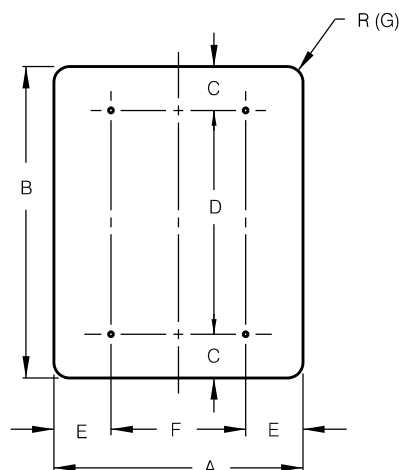


VERTICAL RECTANGLE

A	B	C	D	E	F	G	T
5	7 3/4	1/2	6 3/4	1/2	4	1/4	0.100
48	60	6	48	9	30	3	0.100

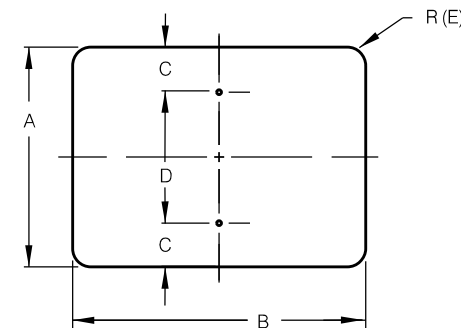

HORIZONTAL RECTANGLE

A	B	C	D	E	T
6	12	1	4	1/4	0.080
6	18	1	4	1/4	0.080
20	36	1 1/2	17	1 1/2	0.080
21	15	1 1/2	12	1 1/2	0.080
24	12	1 1/2	9	1 1/2	0.080
24	18	3	12	1 1/2	0.080
30	15	1 1/2	12	1 1/2	0.080
30	24	3	18	1 1/2	0.080
36	12	1 1/2	9	1 1/2	0.080

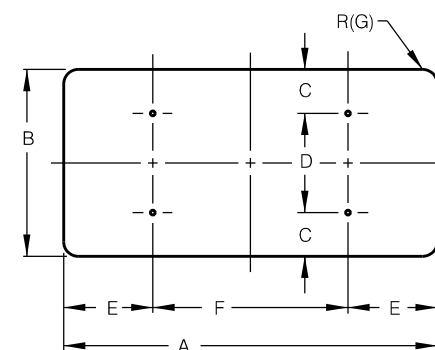

HORIZONTAL RECTANGLE

A	B	C	D	E	F	G	T
36	24	3	18	6	24	1 1/2	0.100
48	24	3	18	9	30	1 7/8	0.100
48	36	6	24	9	30	2 1/4	0.100
48	24	2	20	2	44	1 7/8	0.100
48	36	3	30	3	42	2 1/4	0.100
48	36	6	24	12	36	2 1/4	0.100
60	30	3	24	3	42	1 7/8	0.100
60	24	2	20	2	56	1 1/2	0.100
60	36	3	30	3	54	2 1/4	0.100
60	24	3	18	12	36	1 1/2	0.100
60	30	3	24	3	54	1 1/8	0.100

GENERAL NOTES:

- ALL BLANKS TO BE ALUMINUM ALLOY NO. 5052-H38.
- "T" DENOTES THICKNESS OF SIGN BLANKS.
- ALL HOLES SHALL BE 3/8" DIAMETER DRILLED OR PUNCHED AS SHOWN ON EACH BLANK DETAIL AND SHALL BE FREE OF BURRS AND OR ROUGH EDGES.
- SIGN BLANK CORNERS TO BE ROUNDED AS SHOWN ON EACH DETAIL.
- ALL SIGN BLANK TO BE ETCHED, DEGREASED, AND HAVE AN ALODINE FINISH PRIOR TO APPLICATION OF LEGENDS.
- ALL DETAILS ARE NOT TO SCALE.
- ALL DEMENSIONS ARE IN INCHES.
- * HOLE PLACEMENT AS INDICATED ON THE PLANS.

SEPTEMBER 2024

CITY OF SAN ANTONIO

PUBLIC WORKS DEPARTMENT

TRAFFIC ENGINEERING AND OPERATIONS STANDARDS

BLANK SIGN

DETAILS

SHEET 03 OF 04

SM(3)-24

DRWN. BY:	PROJECT NO.:	DATE:	01/31/2024
DSGN. BY:	CHKD. BY: L. BANDA, P.E.	SHEET NO.:	OF